




# Película Safety 20%

Código PS0420

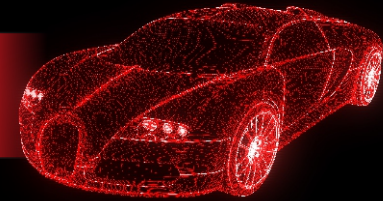

## SPECIFICATIONS

Visible Light Transmission	16%	Shading Coefficient	0.70
Visible Light Reflection int	5.5%	Total Solar Energy Rejection	42 %
Visible Light Reflection Ext	4.9%	Tensile Strength at break	28.000 lbs/in (2.000kg/cm <sup>2</sup> )
Solar Energy Transmission	54 %	Break Strength	112lbs/in
Thicknees	4 Mil (100um)	Elongation at Break	125.0 %
UV Rejection	99.9%	Peel Strength	3.200/in % (1.280g/cm)
Solar Heat Gain Coefficient	0.65	Standard Widths (mm(inch))	1.524(60´) 1.830(72´)

## Funtion of Main Coating

Tinst Coating  
Warranty 4 years

**AUTOMOTIVE**

