




Película Safety 35%

Código PS0435

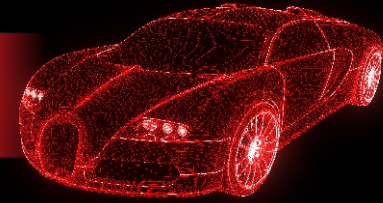

SPECIFICATIONS

Visible Light Transmission	38%	Shading Coefficient	0.73
Visible Light Reflection int	5.0%	Total Solar Energy Rejection	34 %
Visible Light Reflection Ext	6.0%	Tensile Strength at break	28.000 lbs/in (2.000kg/cm ²)
Solar Energy Transmission	54 %	Break Strength	112lbs/in
Thicknees	4 Mil (100um)	Elongation at Break	125.0 %
UV Rejection	99.9%	Peel Strength	3.200/in % (1.280g/cm)
Solar Heat Gain Coefficient	0.64	Standard Widths (mm(inch))	1.524(60´) 1.830(72´)

Funtion of Main Coating

Tinst Coating
Warranty 4 years

AUTOMOTIVE

