




# Película Safety 50%

Código PS0450

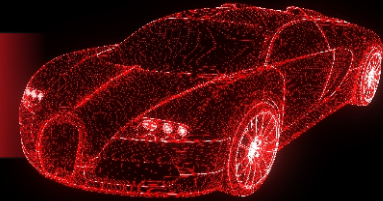

## SPECIFICATIONS

Visible Light Transmission	52%	Shading Coefficient	0.77
Visible Light Reflection int	5.0%	Total Solar Energy Rejection	28 %
Visible Light Reflection Ext	6.0%	Tensile Strength at break	28.000 lbs/in (2.000kg/cm2)
Solar Energy Transmission	54 %	Break Strength	112lbs/in
Thicknees	4 Mil (100um)	Elongation at Break	125.0 %
UV Rejection	99.9%	Peel Strength	3.200/in % (1.280g/cm)
Solar Heat Gain Coefficient	0.68	Standard Widths (mm(inch))	1.524(60´) 1.830(72´)

## Funtion of Main Coating

Tinst Coating  
Warranty 4 years

AUTOMOTIVE

